


# ALDERLEA DOOR PIN FIX INSTRUCTIONS

1. Remove the right hand grill top.
2. Remove the bolt and washer from the right hand side of the crown using a 7/16" socket. Fig #1

**(Do not loosen or adjust the left hand side bolt in any way in order to maintain the position of the crown)**

3. Place the door pin retainer with the 1/4" nut facing downward. Center the nut in the hole of the crown casting above the door pin. Fig #2 & Fig #2a

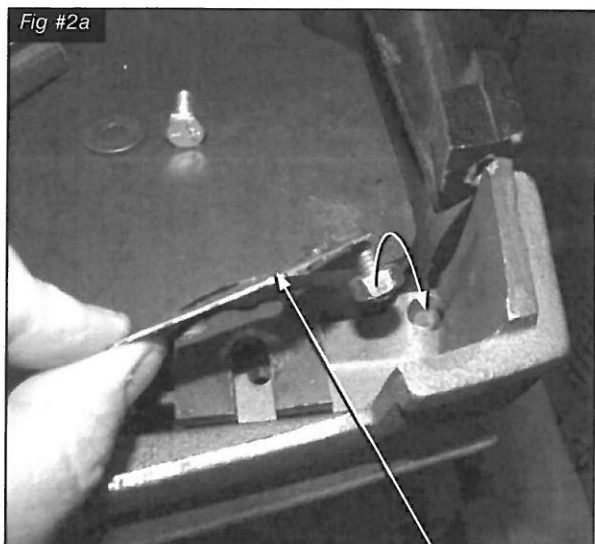

DOOR PIN RETAINER




4. Replace and tighten the bolt on the right hand side of the crown being sure to maintain the door pin retainer in the correct position.. Fig #3

5. Replace the right hand grill top.

Note position of the adjustable bolt on the retainer. The AL T4 and AL T5 both require the bolt to have the head facing down to the pin, the nut is used on the opposite side of the retainer to lock the bolt in position. The bolt may need to be adjusted to suit.

Alderlea T4  
Alderlea T5

AL T4  
AL T5

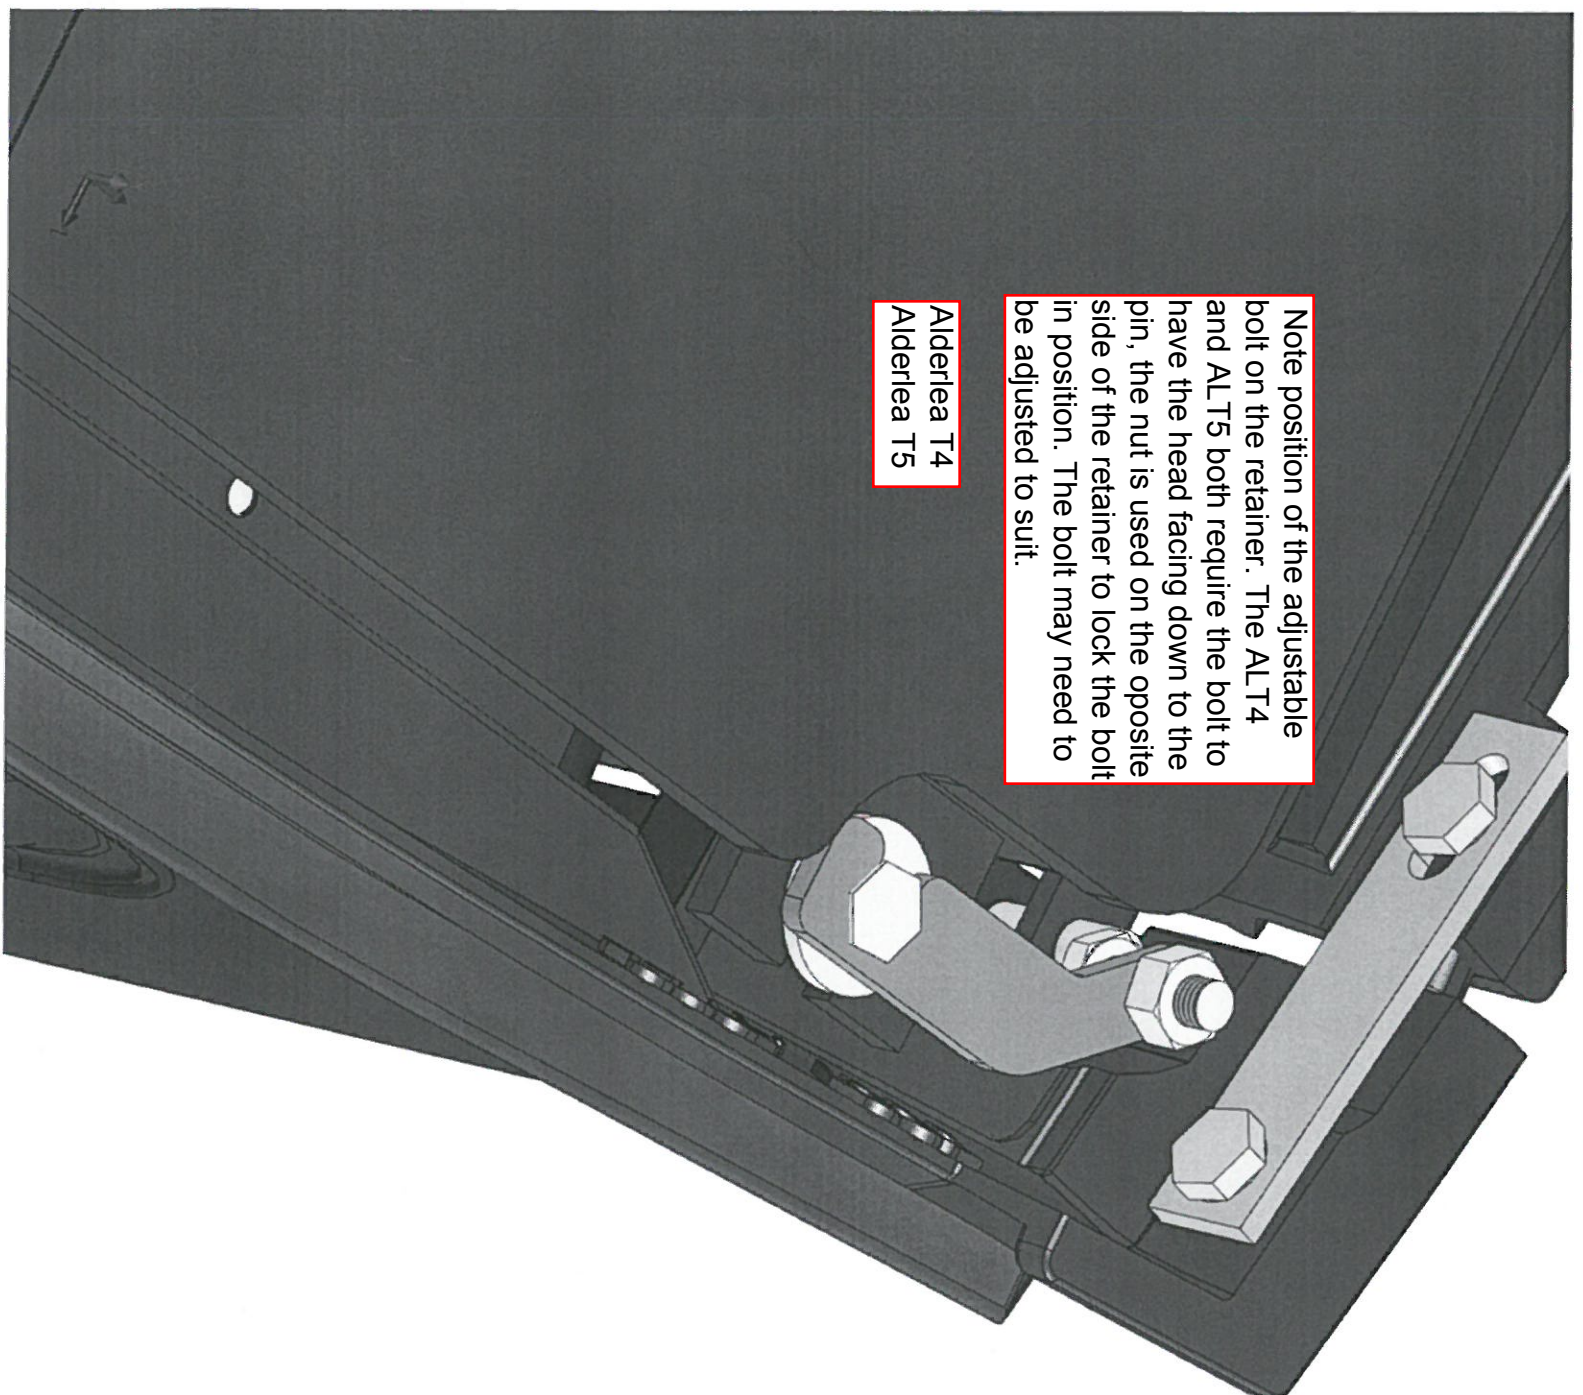



AL T6

Note position of the adjustable bolt on the retainer.  
The AL T6 requires the bolt to have the head facing up above the retainer, the nut is on the same side of the retainer to lock the bolt in position. The bolt may need to be adjusted to suit.

Alderlea T6

