



PVFCB
POWER VENT FAN SPEED CONTROL BOX

- The installation of this KIT must be done by a qualified and certified gas appliance installer.
- Check local codes and read all instructions prior to installation.


NOTICE

Installer: Leave this manual with the appliance.
Consumer: Retain this manual for future reference.


⚠ WARNING

Some materials used in the manufacturing process of this product can expose you to Benzene which is known in the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65warnings.ca.gov

Installation

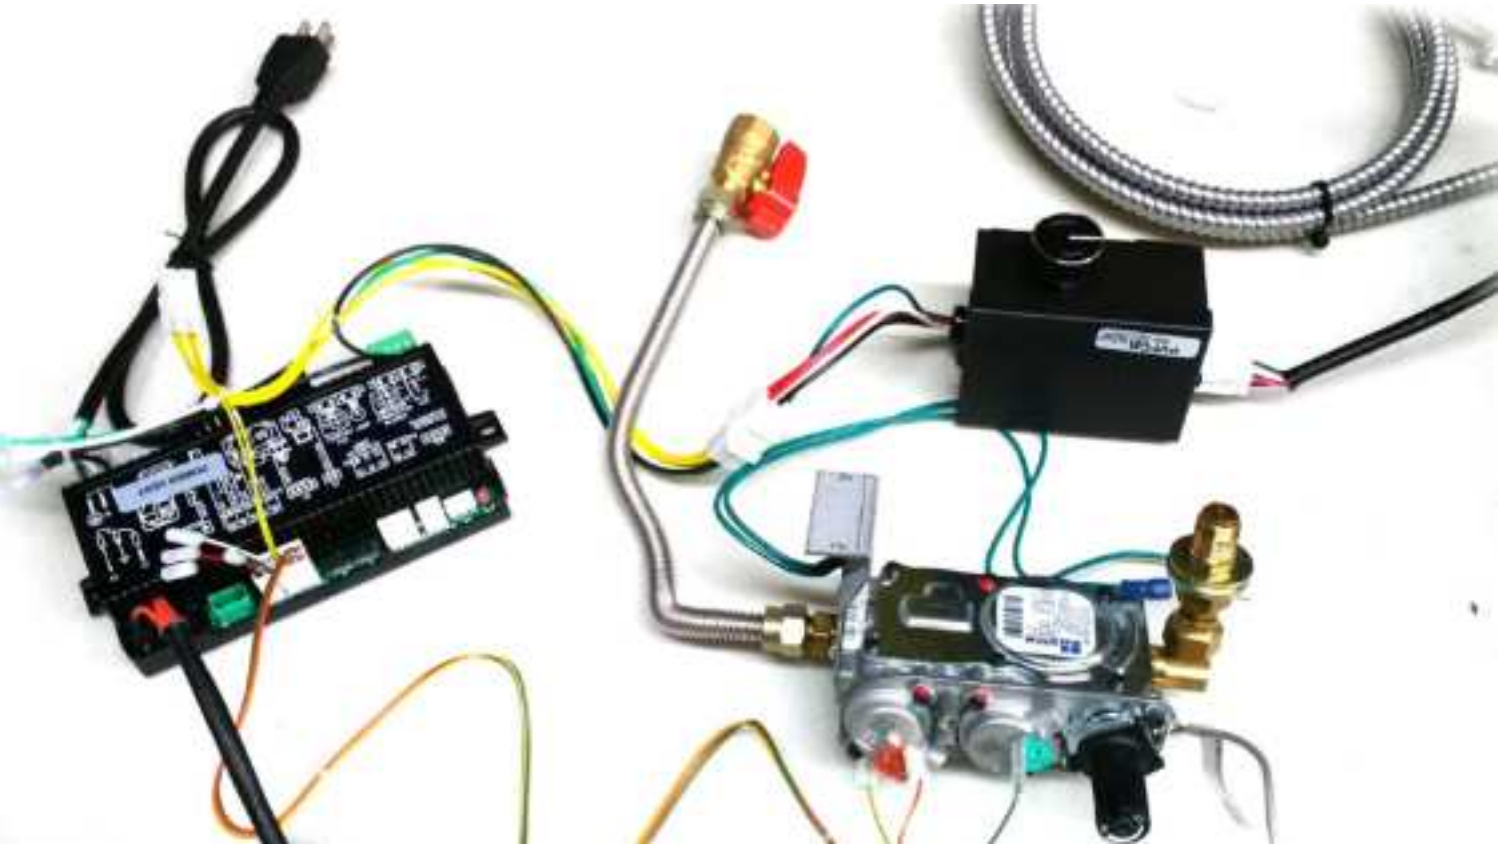

- 1** Install the PVFCB between the 6-pin Molex connector of the fireplace harness and the plug the EPVH-** power cord into the mating 6-pin Molex connector in the box, as in the photo above.
- 2** Turn on fireplace with remote or wall switch, allow the unit to run for 20 minutes. At full speed, turn dial to the left until it clicks off then right click ON this is maximum speed.

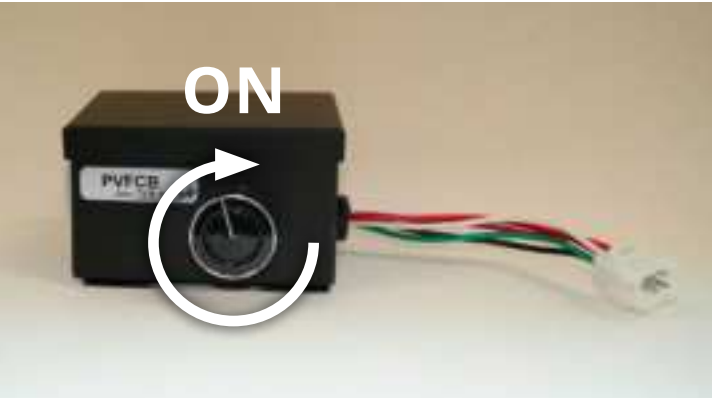

- 3** After 20 minutes of running turn speed control to the right, the motor speed will slow, keep turning the control knob to the right until the burner turns off. This point is the slowest speed the venter may run in this installation. Turn the speed control back to the left until the pilot begins to reignite and the burner comes back ON. This is the minimum speed point for the installation.
- 4** If the fireplace cycles on/off due to windy conditions, increase the speed of the venter to overcome this situation.